


COMPACT

Multi Purpose-Hotmelt: Beschichtungs- und Laminiermaschine – kombinierte Gravur- und Multi-Roller-Maschine

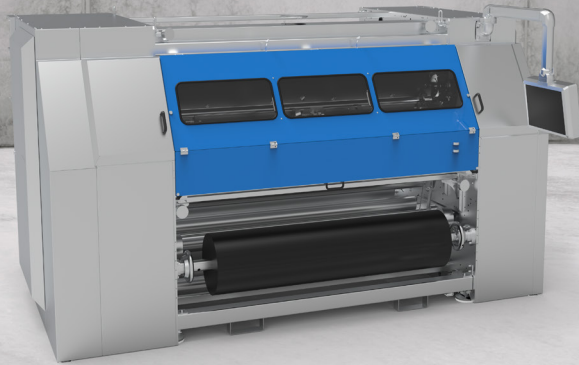


COMPACT

Multi Purpose-Hotmelt: Beschichtungs- und Laminiermaschine – kombinierte Gravur- und Multi-Roller-Maschine

Zur Verarbeitung von thermoplastischen und reaktiven Hotmelts für multifunktionale Lamine und vollflächige Beschichtungen.

Breite Anwendung für flexible Lamine aller Art wie technische Textilien, automobile Innenraumkomponenten, multifunktionale Oberbekleidung, Textilien im Medizinbereich, Heimtextilien, Textilien für Bau- und Industriebedarf (wie z. B. Dachunterspannbahnen, Schleifmittel, Klebebänder) und faserbasierende Verbundstoffe (wie z. B. Filtermedien).

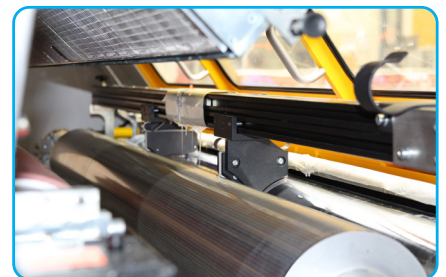


TECHNISCHE DATEN:

Maschinentyp	Compact
Arbeitsbreiten	1.000 - 3.200 mm
Maschinengeschwindigkeit	3 bis 40 m/min
Klebstoff	Thermoplastische und reaktive Hotmelts
Auftragsart	Rasterpunkt / vollflächig / O.C.S
Auftragsgewichte	5 – 40 g/m ² mit Gravurwalze 5 – 500 g/m ² vollflächig, stufenlos verstellbar
Auftragstemperatur	50 – 210 °C
Auftragstechniken	MRBL: Mehrwalze MPBL: Multi Purpose
Viskositäten	2.000 – 40.000 mPas
Heizmedium	Thermalöl

ANWENDUNGSBEREICHE:



AUFTRAGSSYSTEME:

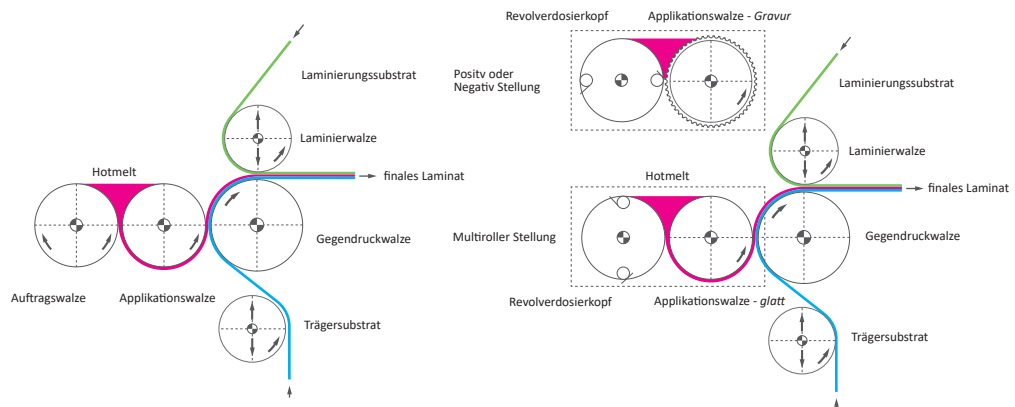

THINK GLOBAL
THINK LACOM


LACOM GmbH

Anton-Grimmer-Straße 5-7, 73466 Lauchheim / Germany

Tel. +49 7363 951-0 / mail:info@lacom-online.de / www.lacom-online.de

COMPACT

Multi Purpose Hotmelt: Coating and laminating machine - combined engraving and multi-roller machine

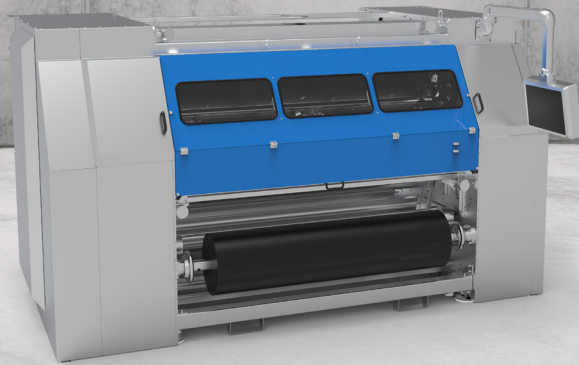


COMPACT

Multi Purpose Hotmelt: Coating and laminating machine - combined engraving and multi-roller machine

For processing thermoplastic and reactive hotmelts for multifunctional laminates and full-surface coatings.

Broad application for all types of flexible laminates such as technical textiles, automotive interior components, multifunctional textiles, medical textiles, home textiles, materials for construction and industrial use (such as roofing membranes, abrasives, adhesive tapes) and fiber-based composites (such as filter media).

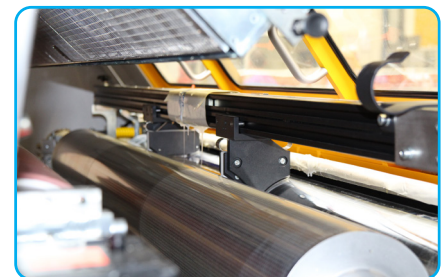


TECHNICAL DATA:

Machine type	Compact
Working widths	1.000 - 3.200 mm
Machine speed	3 bis 40 m/min
Adhesive type	Thermoplastic and reactive hotmelts
Application type	Dot / full surface / O.C.S.
Application weights	5 – 40 g/m ² with engraving roller 5 – 500 g/m ² full surface, infinitely adjustable
Application temperature	50 – 210 °C
Application techniques	MRBL: Multi roll MPBL: Multi Purpose
Viscosities	2.000 – 80.000 mPas
Heating medium	Thermal oil

AREAS OF APPLICATION:



APPLICATION SYSTEMS:

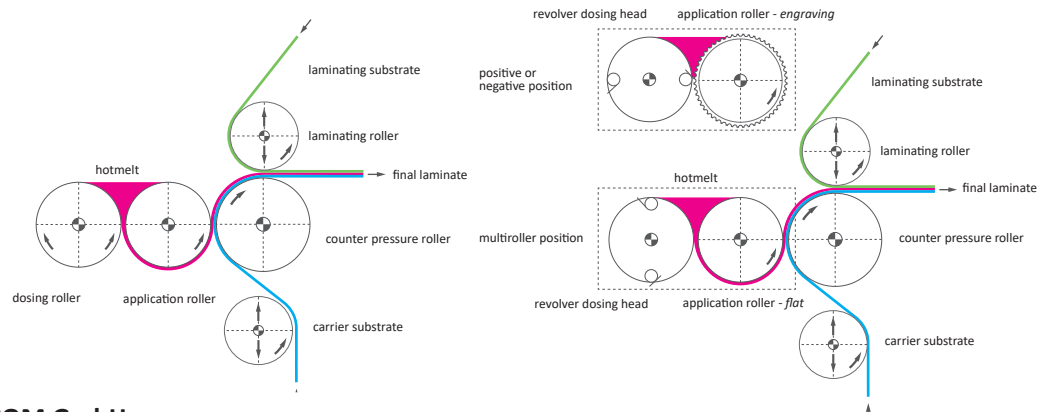

THINK GLOBAL
THINK LACOM

LACOM GmbH

Anton-Grimmer-Straße 5-7, 73466 Lauchheim / Germany

phone. +49 7363 951-0 / mail:info@lacom-online.de / www.lacom-online.de