

PILOT-Textil

Multi Purpose-Hotmelt: Beschichtungs- und Laminiermaschine – kombinierte Gravur- und Multi-Roller-Maschine



PILOT-Textil

Multi Purpose-Hotmelt: Beschichtungs- und Laminiermaschine – kombinierte Gravur- und Multi-Roller-Maschine

Zur Verarbeitung von thermoplastischen und reaktiven Hotmelts für hochatmungs-aktive Lamine und vollflächige Beschichtungen.

Breite Anwendung für flexible Lamine aller Art wie technische Textilien, Automotiv, Transportation, multifunktionale Oberbekleidung, Medizin, Heimtextilien, Bau- und Industriebedarf (wie z. B. Dachunterspannbahnen, Schleifmittel, Klebebänder).





TECHNISCHE DATEN:

Maschinentyp	Pilot-Textil
Arbeitsbreiten	500 mm
Maschinengeschwindigkeit	1 bis 20 m/min
Klebstoff	Thermoplastische und reaktive Hotmelts
Auftragsart	Rasterpunkt / vollflächig / O.C.S
Auftragsgewichte	5 – 40 g/m ² mit Gravurwalze 5 – 150 g/m ² vollflächig, stufenlos verstellbar
Auftragstemperatur	50 – 210 °C
Auftragstechniken	MRBL: Mehrwalze MPBL: Multi Purpose
Viskositäten	2.000 – 40.000 mPas
Heizmedium	Thermalöl

ANWENDUNGSBEREICHE:



AUFTRAGSSYSTEME:

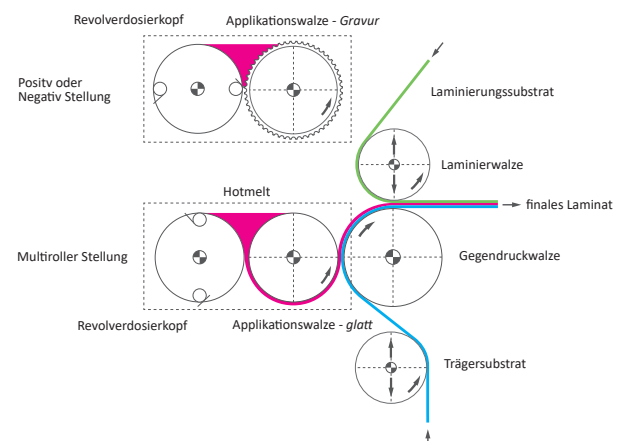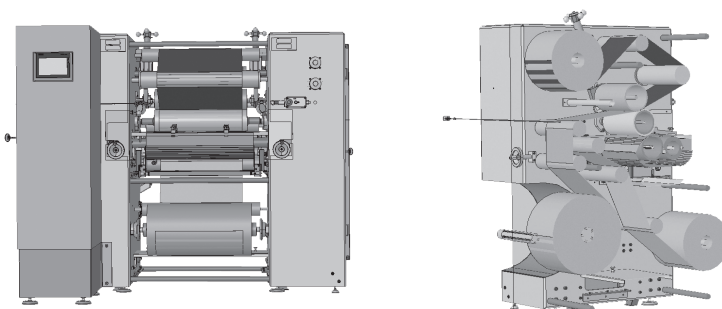

THINK GLOBAL
THINK LACOM

LACOM GmbH

Anton-Grimmer-Straße 5-7, 73466 Lauchheim / Germany

Tel. +49 / 7363 951-0 / mail:info@lacom-online.de www.lacom-online.de

PILOT-Textile

Multi-purpose hot melt: Coating and laminating machine - combined engraving and multi-roller machine



PILOT -Textile

Multi-purpose hot melt: Coating and laminating machine - combined engraving and multi-roller machine

For processing thermoplastic and reactive hotmelts for highly breathable active laminates and full-surface coatings.

Broad application for flexible laminates of all kinds such as technical textiles, automotive, multifunctional outerwear, medicine, home textiles, construction and industrial supplies (e.g. roofing membranes, abrasives, adhesive tapes).





TECHNICAL DATA:

Machine type	Pilot-Textile
Working widths	500 mm
Machine speed	1 bis 20 m/min
Adhesive type	Thermoplastic and reactive hotmelts
Application type	Dot / full surface / O.C.S.
Application weights	5 – 40 g/m ² with engraving roller 5 – 150 g/m ² full surface, infinitely adjustable
Application temperature	50 – 210 °C
Application techniques	MRBL: Multi roll MPBL: Multi Purpose
Viscosities	2.000 – 80.000 mPas
Heating medium	Thermal oil

AREAS OF APPLICATION:



APPLICATION SYSTEMS:

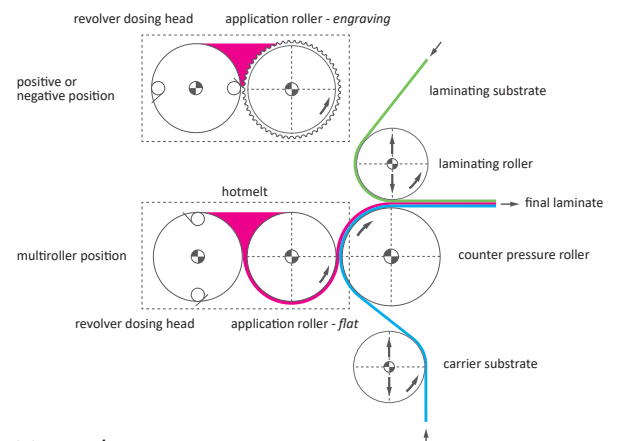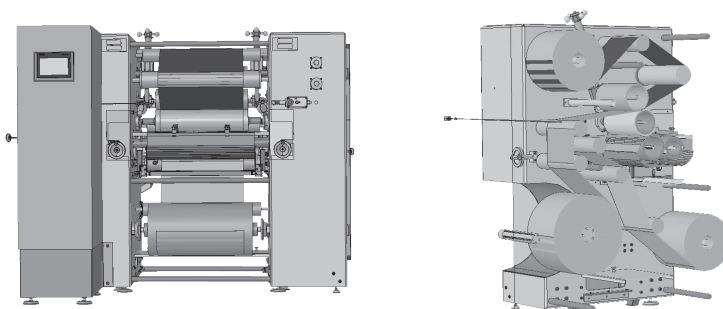

THINK GLOBAL
THINK LACOM

LACOM GmbH

Anton-Grimmer-Straße 5-7, 73466 Lauchheim / Germany

phone +49 7363 951-0 / mail: info@lacom-online.de / www.lacom-online.de