


Our plant concepts

With our systems, you can laminate decorative films with thicknesses between 50 and 600 μm and automotive films between 0.5 and 5 mm. The temperatures during the lamination process are up to 200 $^{\circ}\text{C}$.

- Inline systems for non-stop design changes during ongoing production
- Machines for direct and/or indirect paint application
- Concurrent or counter-rotating painting
- UV varnish in "High gloss" and "Super matt"
- Primer coating
- Sleeve technology
- Trolley systems for fast product changeovers

For our customers' products:

- Multifunctional duplex and triplex laminates for sports and leisure clothing (e.g. outdoor)
- Protective workwear
- Heat protection articles (e.g. clothing, non-garment)
- Laminated and coated materials for the automotive industry (interior fittings)
- Foam or fleece laminated upholstery fabrics
- Laminates and coatings for the shoe industry (e.g. insoles, shoe caps)
- Textile coatings for non-slip finishing or other functional layers

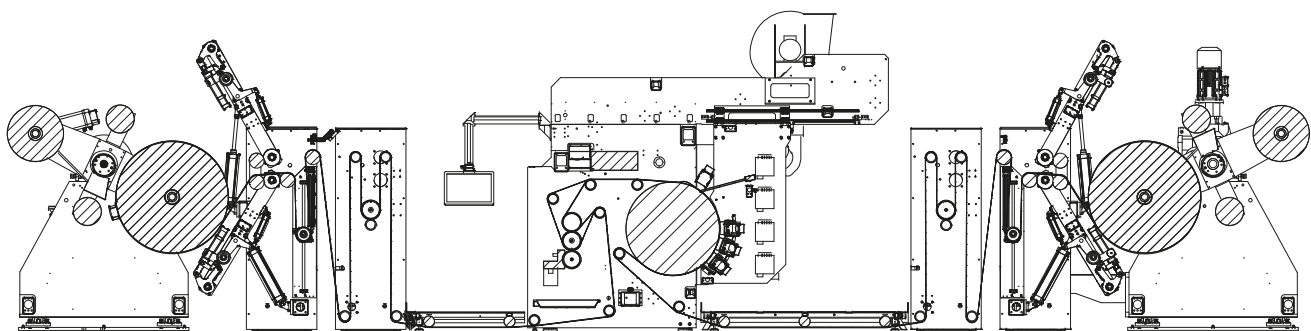

Unwinder

Laquering station

UV-Unit with
excimer

Rewinder

